

APPLICATIONS




Le tuyau POLYTECH® a été élaboré pour transférer l'ensemble des produits alimentaires, cosmétiques, pharmaceutiques et chimiques, même les plus agressifs. Il possède une excellente résistance en application dynamique.

COMPOSITION



- Tube : PFA (fluoropolymère) inerte ultra lisse et non adhérent.
- Renfort : trame textile et spires acier galvanisé noyées dans la paroi.
- Revêtement extérieur : EPDM bleu (Autres couleurs sur demande).

POSSIBILITÉS D'ASSEMBLAGE

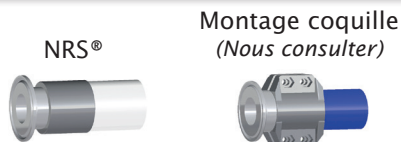

Montage coquille
(Nous consulter)

CARACTÉRISTIQUES



Longueur standard de fabrication : 20 m.
Nettoyage : produits CIP, stérilisation (à 135°C pendant 30 min maximum).
Pour les utilisations en zones ATEX, voir POLYTECH CP® et POLYTECH CC®.



+130°C Applications dynamiques :
-30°C nous consulter.

NORMES





FDA 21CFR 177 1550, USP Physicochemical 661, Test de cytotoxicité, Hemolysis, USP Class VI, Règlement (UE) 10/2011, Règlement (CE) 2023/2006, testé et qualifié par le BNIC (Bureau National Interprofessionnel du Cognac), sans phtalate.



Référence	DN		Ø int		Ø ext		Pression de service		Pression d'éclatement		Rayon de courbure		Vide		Poids	
	mm	inch	mm	inch	mm	inch	bar	PSI	bar	PSI	mm	inch	bar	PSI	kg/m	lb/f
45815113	13	1/2"	13	0,51	25	0,98	10	145	30	435	55	2,20	-0,9	-13	0,58	0,39
45815116	16	5/8"	16	0,63	28	1,10	10	145	30	435	70	2,80	-0,9	-13	0,66	0,44
45815119	19	3/4"	19	0,75	31	1,22	10	145	30	435	90	3,50	-0,9	-13	0,78	0,52
45815125	25	1"	25	1,00	37	1,46	10	145	30	435	130	5,10	-0,9	-13	0,95	0,64
45815132	32	1"1/4	32	1,25	45	1,77	10	145	30	435	180	7,10	-0,9	-13	1,15	0,77
45815138	38	1"1/2	38	1,50	51	2,00	10	145	30	435	240	9,04	-0,9	-13	1,40	0,94
45815151	50	2"	51	2,00	65,5	2,56	10	145	30	435	290	11,40	-0,9	-13	2,00	1,34
45815163	63	2"1/2	63	2,50	79,5	3,11	10	145	30	435	375	14,80	-0,9	-13	2,85	1,91
45815176	76	3"	76	3,00	92	3,62	10	145	30	435	500	19,70	-0,9	-13	3,36	2,26
458151100	100	4"	100	3,94	116	4,57	10	145	30	435	600	23,60	-0,9	-13	5,00	3,36

Les valeurs ci-dessus sont données pour une utilisation à température ambiante (+/- 20°C) et peuvent varier en fonction des conditions d'utilisation.
Tolérances dimensionnelles : nous consulter.

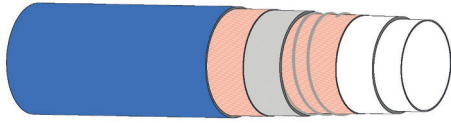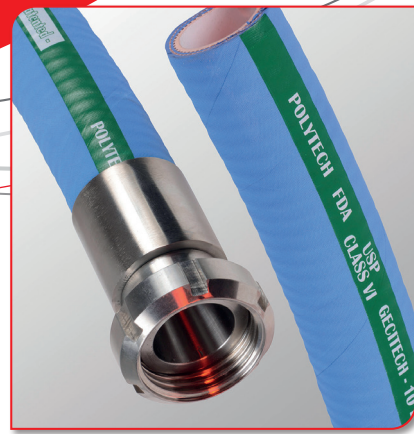

APPLICATIONS



The POLYTECH® hose is designed for transferring food, cosmetic, pharmaceutical and chemicals, even the most aggressive. It has excellent dynamic resistance in use.

COMPOSITION




- Tube: PFA (fluoropolymer) inert, ultra-smooth and non-adherent.
- Reinforcement: textile frame and galvanized steel embedded in the wall.
- External covering: Blue EPDM (other colours on request).

ASSEMBLY POSSIBILITIES



NRS®

Reusable ferrule assembly
(Contact us)



CHARACTERISTICS



Standard manufacturing length: 5.60 m.
Cleaning: CIP products, steam sterilisation (135°C for 30 min), autoclaving.



+130°C Dynamic applications:
-30°C Contact us.

STANDARDS



FDA 21CFR 177 1550, USP Physicochemical 661, cytotoxicity test, Hemolysis, USP class VI, Regulation (EU) 10/2011, Regulation (EC) 2023/2006, tested and qualified by BNIC (Bureau National Interprofessionnel du Cognac [Cognac Inter-professional National Office]), phthalate free.



Reference	DN		Ø int		Ø ext		Working pressure		Bursting pressure		Bend radius		Vacuum		Weight	
	mm	inch	mm	inch	mm	inch	bar	PSI	bar	PSI	mm	inch	bar	PSI	kg/m	lb/f
45815113	13	1/2"	13	0,51	25	0,98	10	145	30	435	55	2,20	-0,9	-13	0,58	0,39
45815116	16	5/8"	16	0,63	28	1,10	10	145	30	435	70	2,80	-0,9	-13	0,66	0,44
45815119	19	3/4"	19	0,75	31	1,22	10	145	30	435	90	3,50	-0,9	-13	0,78	0,52
45815125	25	1"	25	1,00	37	1,46	10	145	30	435	130	5,10	-0,9	-13	0,95	0,64
45815132	32	1"1/4	32	1,25	45	1,77	10	145	30	435	180	7,10	-0,9	-13	1,15	0,77
45815138	38	1"1/2	38	1,50	51	2,00	10	145	30	435	240	9,04	-0,9	-13	1,40	0,94
45815151	50	2"	51	2,00	65,5	2,56	10	145	30	435	290	11,40	-0,9	-13	2,00	1,34
45815163	63	2"1/2	63	2,50	79,5	3,11	10	145	30	435	375	14,80	-0,9	-13	2,85	1,91
45815176	76	3"	76	3,00	92	3,62	10	145	30	435	500	19,70	-0,9	-13	3,36	2,26
458151100	100	4"	100	3,94	116	4,57	10	145	30	435	600	23,60	-0,9	-13	5,00	3,36

The above values are given for use at ambient temperature (+/- 20°C) and may vary depending upon conditions of use.
Dimensional tolerances: contact us.